



ENAPART



93 S Railroad Avenue Unit C
Bergenfield NJ 07621 USA
www.enapart.com
sales@enapart.com



Via del Canneto 35,
Borgosatollo, Brescia - Italia
www.enapart.it
vendite@enapart.it



Barbaros Mah. Ihlamur Bul. Aĝaoĝlu
My Newwork No:3/15 Ataşehir / İstanbul
www.enapart.net
satis@enapart.net



PRIVADA 10 B SUR #3908 COL.
ANZUREZ, C.P. 72530, PUEBLA, PUE
www.enapart.com.mx
sales@enapart.com.mx



Friedrich-Ebert-Anlage 36, 60325
Frankfurt am Main, Germany
www.enapart.de
anfrage@enapart.de



4 boulevard Carnot, 95400
villiers-le-bel, Paris, France
www.enapart.fr
sales@enapart.fr



65049, ОДЕСА, ВУЛИЦЯ ІВАНА
ФРАНКА, БУДИНОК 55, ПОВЕРХ 3
www.enapart.com.ua
sales@enapart.com.ua



MUNICIPIUL BUCUREȘTI, SECTOR 3,
B-DUL BASARABIA, NR.250, CORP P+5
www.enapart.ro
sales@enapart.ro



〒584-0023 大阪府富田林市若松町
東2丁目2番16号
www.enapart.co.jp
sales@enapart.co.jp



PLAZA NUESTRA SEÑORA DE LAS
NIEVES 12 ,LOCAL ,50012,ZARAGOZA
www.enapart.es
ventas@enapart.es



Складова база „Онгъл“, Склад А2, п.к.
4006, гр. Пловдив, България
www.enapart.bg
sales@enapart.bg



3 Austin Mews, High Street, Hemel
Hempstead, HP1 3AF , United Kingdom
www.enapart.co.uk
sales@enapart.co.uk

MAIN FEATURES

Miniaturized \varnothing 30 mm encoder series for application in small devices.
Recommended when a minimal size is required even providing excellent performances.

- 3 channel encoder (A / B / Z) up to 2500 ppr
- Power supply up to +28 VDC with several electronic interfaces available
- Up to 220 kHz output frequency
- Cable output, connectors available on cable end
- Solid shaft diameter up to 6 mm
- Mounting by clamping or threaded flange



ORDERING CODE

EL 30E 50 S 5/28 N 4 X 3 PA .XXX

SERIES
incremental encoder series **EL**
incremental encoder series **ER**

MODEL
clamping flange \varnothing 15 mm **30E**
M18 threaded flange **30H**

RESOLUTION
ppr from **1** to **2500**
see table for pulses availability

ZERO PULSE
without zero pulse **S**
with zero pulse **Z**

POWER SUPPLY
(with L electronic interface) 5 V DC **5**
(with L or PC electronic interface) 8 ... 24 V DC **8/24**
5 ... 28 V DC **5/28**

ELECTRONIC INTERFACE
NPN **N**
NPN open collector **C**
push-pull **P**
push-pull protected (AEIC-7272) **PC**
line driver **L**
power supply 5/28V - output RS-422 **RS**

SHAFT DIAMETER
(mod. E) mm **4**
mm **6**


ENCLOSURE RATING
IP 54 **X**

MAX ROTATION SPEED
3000 rpm **3**

OUTPUT TYPE
axial cable (standard length 0,5 m) **PA**
radial cable (standard length 0,5 m) **PR**


VARIANT
custom version **XXX**

EL - ER 30 E (axial output)

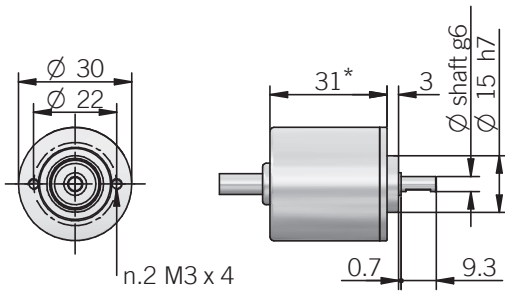

dimensions in mm

EL - ER 30 H (axial output)

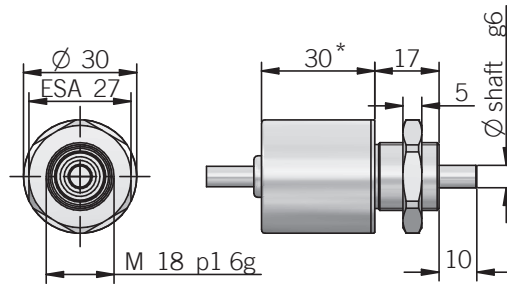

* radial output + 2,3

ELECTRICAL SPECIFICATIONS	
Resolution	from 1 to 2500 ppr
Power supply	5 = 4,5 ... 5,5 V DC 5/28 = 4,75 ... 28,6 V DC 8/24 = 7,6 ... 25,2 V DC (reverse polarity protection)
Power draw without load	800 mW
Max load current	N / C / P / PC = 50 mA / channel L / RS = 20 mA / channel
Output type*	NPN / NPN open collector / push-pull / line driver
Max output frequency	100 kHz EL series 220 kHz ER series
Counting direction	A leads B clockwise (shaft view)
Electromagnetic compatibility	IEC 61000-6-2 IEC 61000-6-4

*output levels according to power supply, for further details please see under Technical basics section

EL SERIES RESOLUTIONS
1 - 10 - 20 - 25 - 50 - 60 - 64 - 150

ER SERIES RESOLUTIONS
100 - 128 - 200 - 250 - 256 - 300 - 360 - 400 - 500 - 512 - 600 - 625 - 720 - 800 - 1000 - 1024 - 1200 - 1250 - 1440 - 1600 - 2000 - 2048 - 2500

please directly contact our offices for other pulses, preferred resolutions in bold

CONNECTIONS		
Function	Cable output N / C / P / PC	Cable output Line driver
+V DC	red	red
0 V	black	black
Ch. A	green	green
Ch. A-	/	brown
Ch. B	yellow	yellow
Ch. B-	/	orange
Ch. Z	blue	blue
Ch. Z-	/	white
⊥	shield	shield

MECHANICAL SPECIFICATIONS	
Shaft diameter	ø 4 / 6 mm
Enclosure rating	IP 54 (IEC 60529)
Max rotation speed	3000 rpm
Max shaft load	5 N axial / radial
Shock	50 G, 11 ms (IEC 60068-2-27)
Vibration	10 G, 10 ... 2000 Hz (IEC 60068-2-6)
Moment of inertia	0,05 x 10 ⁻⁶ kgm ²
Starting torque (at +20°C / +68°F)	< 0,005 Nm
Body material	EN-AW 2011 aluminum
Shaft material	1.4305 / AISI 303 stainless steel
Housing material	PA66 glass fiber reinforced
Bearings	2 ball bearings
Bearings life	10 ⁹ revolutions
Operating temperature	-10° ... +60°C (+14° ... +140°F) EL series -25° ... +85°C (-13° ... +185°F) ER series
Storage temperature	-25° ... +85°C (-13° ... +185°F)
Weight	70 g (2,47 oz)