
Panel Seal MRE(36°Step)

Miniature Rotary Switches

RoHS Compliant

The panel sealing capability of the switch ensures no problem when it is left in water 1 meter deep for 30 minutes. However, do not operate the switch in water.






Specifications


Features

- 1. The switch is designed for panel seal. The builtin O-ring prevents entry of water drops and dust through the panel.
- 2. Diallyl phthalate resin (UL94V-0), which has excellent resistance to arc and heat, and superb insulation quality is employed.
- 3. The terminals are molded in to ensure the permanent seal structure which completely prevents flux entry through the terminals.
- 4. Adoption of the wiping mechanism for the contacting area to ensure contact stability and reliability.


opeonioutions						
Contact plating.		Silver plated	Gold plated			
Rating	Max.	500mA 125VAC				
	Min.	10mA 5VAC/DC	5mA 6VDC			
Initial contact resistance		10mΩ max.(1A 2~4VDC)	20mΩ max.(1.5mA 200µVAC)			
Dielectric strength		1,000VAC 1 minute				
Insulation resistance		100M Ω min.	00MΩ min. (500VDC)			
Electrical life		10,000 cycles				
Operating force		9.8N•cm max.				
Stopper strength		19.6N•cm				
Operating temperature range		-20~+85℃				
Storage temperature range		-40~+85℃				

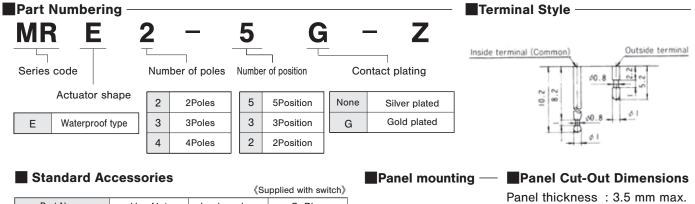


Part Name	Hex Nut	Lockwasher	O-Ring
Part No.	140008010241	140008030051	140000610111
Dimensions	1 4 [°] -40 THD	6.6 1=0.5	7.3
Finish	Nickel plated	Zinc plated	Black Nitril rubber







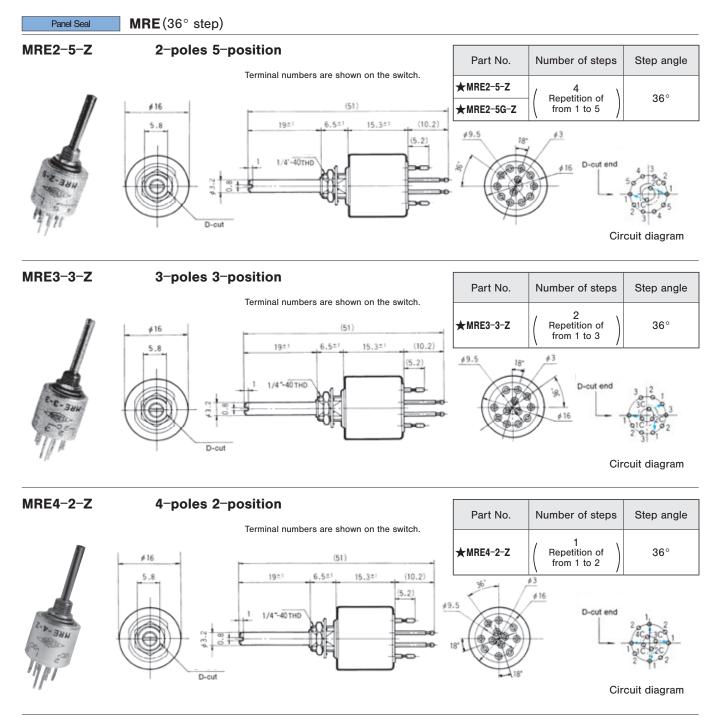

- •The circuit diagrams show the switches as viewed from the terminal side with the shaft fully turned in the counterclockwise direction.
- •A wide variety of optional accessories are available. Specify the part number from Optional Accessories Table on page 542.